

CARGO ECO PLANT2

GREAT LITTLE MOVER

BRIAN JAMES TRAILERS

» Connected to you



UNITED KINGDOM

CARGO ECO PLANT 2

CARGO ECO PLANT2

Great little mover

Featuring a reinforced deck with beavertail, raised sides and punched steel ramps as standard, the **CarGO Eco Plant2** provides effortless loading and towing for compact plant machinery from mini-diggers to dumpers, shredders to scissor-lifts.

Strong and versatile, the **CarGO Eco Plant2** delivers excellent quality and exceptional value.

 GALVANISED FOR LONG LIFE



 HEAVY CAPACITY



● **Heavy capacity**
A class leading light yet tough chassis can accommodate anything from diggers to dumpers, shredders to scissor-lifts.



● **Heavy duty jockey wheel**
Features anti-vibration latch.



○ **Machine stop bar**
Designed to provide a reliable stop for digger and plant machinery. Use in combination with tie-down restraint straps.




● **Low Loading angle**
 The CarGO Eco Plant2 features a low angle beavertail design that enables easy loading and unloading of machinery.



○ **Bucket rest support**
 for extra convenience and ease of use when transporting digger machinery.



○ **'Super-Grip' deck pads**
 Fit on runways to improve grip when loading (x4).

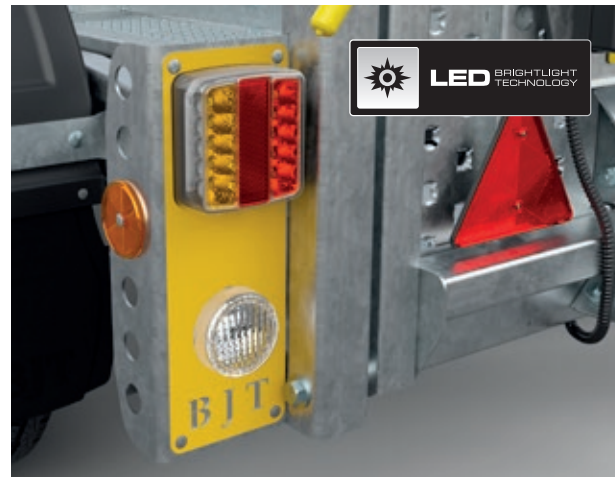

● **LED lighting**
 Super-bright and extremely durable.

○ **Upgrade to Roundpoint lighting**
 Quality 12V filament and LED Roundpoint rear light arrays are available as configurable options.



○ **Manual winch**
 Features auto-brake and removable handle for free-spool release of cable.

SPECIFICATIONS & EQUIPMENT

PRODUCT CODE	515-1122	515-2122	515-2211	515-2222
CAPACITY				
Gross kg	2,600	2,600	1,350	2,600
Load kg	2,183	2,166	986	2,139
Unladen trailer weight kg	417	434	364	461
DIMENSIONS				
Load bed length m	2.30	2.50	2.50	2.50
Internal bed width m	1.10	1.10	1.50	1.50
Internal bed length m	2.30	2.50	2.50	2.50
Overall trailer width m	1.58	1.58	1.98	1.98
Overall trailer length m	4.28	4.28	4.47	4.47
Bed load height m	0.39	0.39	0.39	0.39
Towball height (loaded, centre of towball) m	0.45	0.45	0.45	0.45
RUNNING GEAR				
Axles	2	2	1	2
Wheel / Tyre size	13" (165 6pr)	13" (165 6pr)	13" (165 6pr)	13" (165 6pr)
Sealed wheel bearings, maintenance free	●	●	●	●
Spare wheel	●	●	●	●
Heavy duty jockey wheel	●	●	●	●
LIGHTING				
12V LED trailer lighting - front marker lamps, stop, tail, indicators and registration plate (fog and reverse lamps are roundpoint style 12V filament bulb)	●	●	●	●
Upgrade rear LED unit (brake, tail and indicator) to individual roundpoint style lamps, 12V bulbs	○	○	○	○
Upgrade rear LED unit (brake, tail and indicator) to individual roundpoint style lamps, 12V LED	○	○	○	○
ACCESSORIES				
Digger bucket rest	○	○	○	○
Machine stop bar, adjustable longitudinal position	○	○	○	○
Manual winch	○	○	○	○
LOADING, WHEELS & SECURITY				
Tie-down anchor points (internal)	18	18	18	18
Twin ramp panel with rear support	●	●	●	●
'Super-Grip' deck pads x4	○	○	○	○
Tie-down straps x4 – 4000 DaN heavy duty	○	○	○	○
Steel coupling head with integral high security lock	○	○	○	○
AL-KO 50mm ball coupling with safety ball location indicator	○	○	○	○
WARRANTY				
5 year extended chassis warranty	●	●	●	●

● Standard ○ Optional at extra cost

Brian James Trailers Limited.

Sopwith Way, Drayton Fields Industrial Estate
 Daventry, Northampton, NN11 8PB

T + 44 (0)1327 308 833

Brian James Trailers are available by contacting our sales team as well as through an extensive network of official dealers throughout the country.

For more information please call or visit our website.

www.brianjames.co.uk

Specifications are subject to change without notice.

Illustrations and photography may depict optional equipment.

© BRIAN JAMES TRAILERS LIMITED

Edition CGECO2UK2020_Q1_1



THE QUEEN'S AWARDS
 FOR ENTERPRISE
 INTERNATIONAL TRADE
 2018